


NEW

RT-PLUS®



A Self-flashing PV Mount Featuring Roof Tech's AlphaSeal®

- **ALPHA SEAL™ Self-Flashing System**
- **No Caulking or Pre-Drilling Required**
- **Universal Attachment to Any Slope**
- **UL 2703 A Certified**
- **Comes in Mill Finish or Black Coated**
- **Compatible with Asphalt, Metal, EPDM, TPO and SBS Roofing Systems**
- **Mounting Slots for 3/8" or 5/16" Bolts**

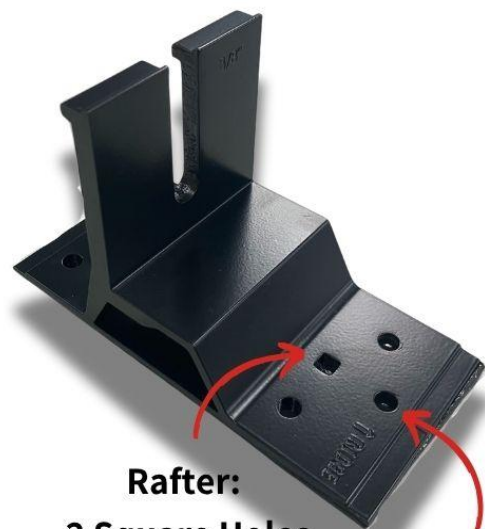

Rafter:
2 Square Holes

Deck:
5 Round Holes
(OSB or Plywood)

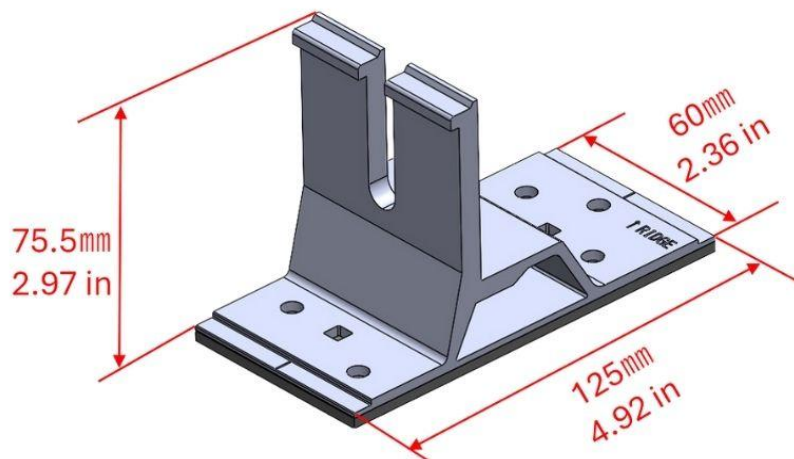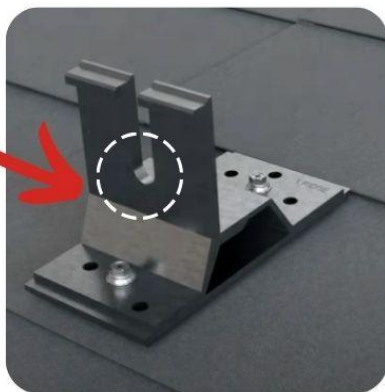

Request A Sample

Compatible racking systems (US): Roof Tech Rail, K2 (Everest) Cross Rail, Single Rail, & Solid Rail, Ironridge XR series & Aire series, UNIRAC SM & NXT, Tamarack FM Rail, Chiko Rails, ProSolar Roof Trac, SnapNrack Ultra Rail, SunModo SMR, EcoFasten Click Fit Rail, Pegasus Rail & Max Rail.



Roof Tech


www.roof-tech.us

info@roof-tech.us



RT-PLUS®

A Self-flashing PV Mount Featuring Roof Tech's AlphaSeal®

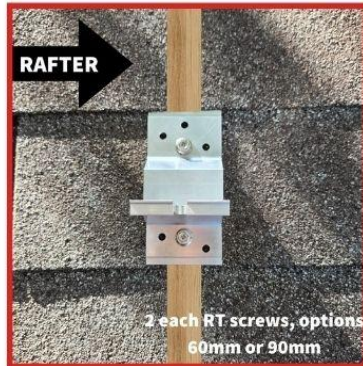

SPECIFICATIONS	RT-PLUS®			
	RT4-00-PLUS-38ML	RT4-00-PLUS-38BK	RT4-00-PLUS-516ML	RT4-00-PLUS-516BK
FINISH	MILL	BLACK COATED	MILL	BLACK COATED
BOLT SLOT DIMENSION	3/8" BOLT	3/8" BOLT	5/16" BOLT	5/16" BOLT
BOX CONTENTS	20EA MOUNTS, 40EA 5X60MM SCREWS, 4EA ALPHASEAL® ADDITIONAL PADS			
CARTON CONTENTS	4 BOXES (80 EA) PER CARTON, 40 CARTONS PER PALLET 3,200 EA PER PALLET			
WOOD ATTACHMENT	DECK (OSB OR PLYWOOD ONLY) AND/OR RAFTER (& HYBRID RAFTER DECK RAFTER)			
OPTIONS	RT2-04-SD5-60 FOR DECK ATTACHMENT & RT-04-SD5-90 FOR RAFTER ATTACHMENT & RT2-04-MNBUTYL			
ROOF PITCH & TYPE	1/2:12 TO 12:12 METAL, ASPHALT SHINGLES, SBS, EPDM, TPO			
FLASHING	ZERO-FAILURE ALPHASEAL® BUTYL			
OPERATING	MINUS 40F TO 250 DEGREES FAHRENHEIT			
INSTALLATION TEMP	22F TO 176 DEGREES FAHRENHEIT DRY SURFACE			
CERTIFICATIONS	UL 2703A			
WARRANTY	25 YEAR LIMITED WARRANTY			



 **Roof Tech**
www.roof-tech.us info@roof-tech.us

